




Backlit Flat Panel Series

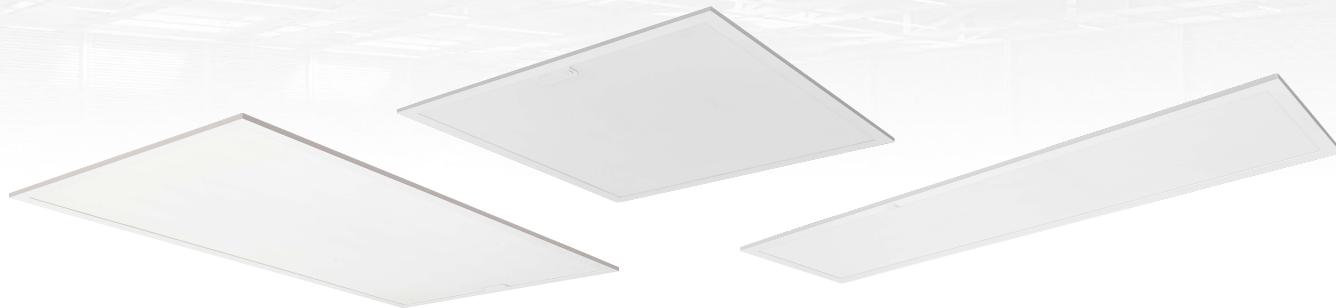

The WareLight back lit flat panel is engineered for adaptability and performance, this cutting-edge panel offers selectable wattage and color temperature (CCT) options to tailor lighting to your specific needs, whether it's for an office, educational institution, or commercial space.

Specifications

CRI (Color Rendering Index)	>80	Ratings & Certifications	UL, DLC 5.1 Premium
Light Source	LED	Dimmable	0-10V
Beam Angle	110°	Lifespan	100,000
Color Temperature Selectable	3500K/4000K/5000K	Mounting Options	Surface Mounting or Hanging Cable
Wattage Selectable	25W-60W	Operating Temperature	-20°C to 50°C (-4°F to 122°F)
LPW	125	Lumens	3,125-7,500
Housing	Steel sheet and extruded aluminum	Voltage	120-277v
Finish	White	Warranty	5-year



Order Information

Backlit Flat Panel Series			Example: WL-BLFP-2x4-C60WS-G3	
Series	Size	Select Wattage	Select CCT	Generation
WL-BLFP	1x4	C40WS 25W/30W/40W	3500K/4000K/5000K	G3
	2x2	C40WS 25W/30W/40W		
	2x4	C40WS 25W/30W/40W C60WS 40W/50W/60W		

Performance Chart

Model Number	Size	Wattage	Lumens	Efficacy	CRI
WL-BLFP-1X4-C40WS-G3	1x4	25W/30W/40W	3,125/3,750/5,000	125 LM/W	>80
WL-BLFP-2X2-C40WS-G3	2x2	25W/30W/40W	3,125/3,750/5,000	125 LM/W	>80
WL-BLFP-2X4-C40WS-G3	2x4	25W/30W/40W	3,125/3,750/5,000	125 LM/W	>80
WL-BLFP-2X4-C60WS-G3	2x4	40W/50W/60W	5,000/6,250/7,500	125 LM/W	>80

Dimensions

Item	Length	Width	Height	Weight
WL-BLFP-1X4-C40WS-G3	47.8"	11.9"	1.4"	5.39 lbs.
WL-BLFP-2X2-C40WS-G3	23.7"	23.7"	1.4"	4.31 lbs.
WL-BLFP-2X4-C40WS-G3	47.8"	23.7"	1.4"	8.14 lbs.
WL-BLFP-2X4-C60WS-G3	47.8"	23.7"	1.4"	8.14 lbs.

WARELIGHT



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003


PROJECT NAME

ITEM #


Fixture Schedule

Notes


WL-BLFP-1X4

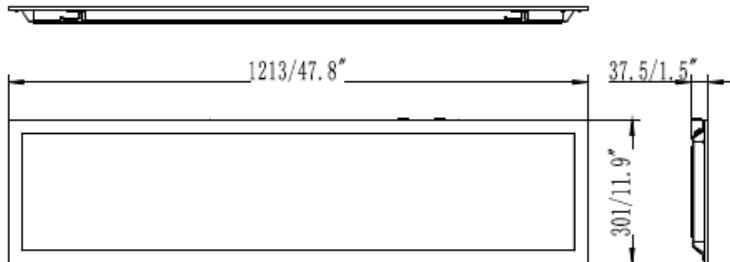


WL-BLFP-2X2

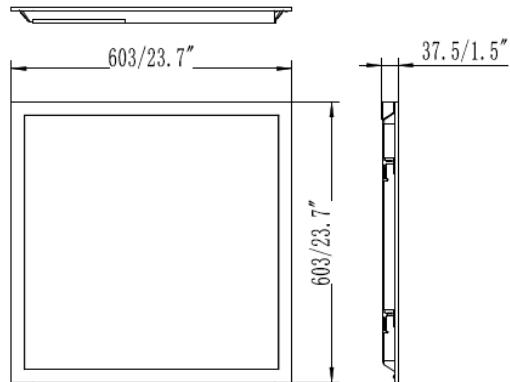

WL-BLFP-2X4

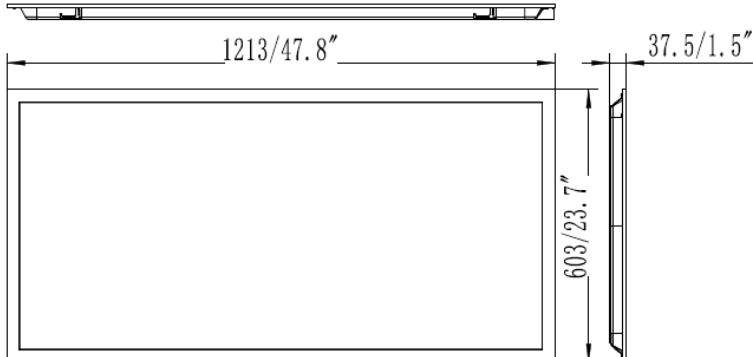

WareSense Blue: Your All-In-One Lighting Solution

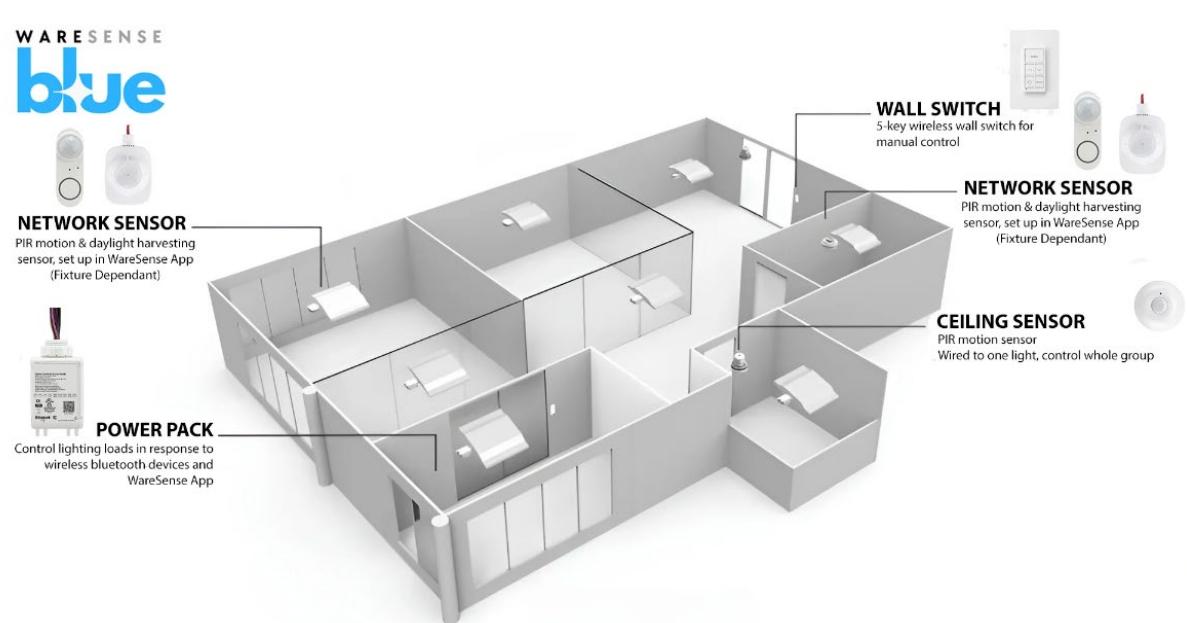

A simple and cost effective localized networked lighting control system using bluetooth mesh.

WareSense Blue delivers a comprehensive, gateway-free wireless solution for managing lighting across diverse settings. This innovative system features wireless controllers for fixtures, switches, and sensors for occupancy and daylight harvesting, all leveraging Bluetooth® technology. Additionally, the system includes a fixture-mounted controller and sensor that combine wireless communication and occupancy/daylight harvesting control into a single unit. Each component is uniquely addressed to send, receive, and share control commands wirelessly. Scalability is straightforward, as each device relays information to the next, extending the network's range and control capabilities.

App Download



INTEGRATED LOW VOLTAGE DAYLIGHT HARVESTING/BI-LEVEL PIR MOTION SENSOR-IFSO6R




PRODUCT OVERVIEW

INTEGRATED LOW VOLTAGE DAYLIGHT HARVESTING/BI-LEVEL PIR MOTION SENSOR-IFSO6R

IFSO6R is compact size PIR sensor combines occupancy sensing with photocell. When used with 0-10V dim-to-off LED drivers, it enables any lighting manufacturer to deliver sensor-equipped fixtures with minimal engineering effort. It operates on 12V DC which can be supplied by a LED driver, which will save OEM cost on manufacturer side. Different mode can be selected according to different applications through RM5 IIR remote controller. The integrated photocell can switch the lights on and off for dusk to dawn control, so that lighting remains on overnight even without motion detection. Under daylight harvesting mode, the auto-calibration function can control the amount of electric light by measuring the overall combined natural and electric light to achieve the desired light level. Support push button wire connection. Support super low profile luminare.

DIMENSION

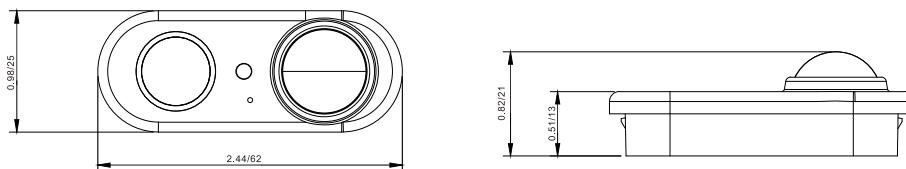

WIRING



MODELS

IFSO6R, 12V DC

SPECIFICATIONS AND FEATURES

Input Voltage: 12V DC

Input Current: 9mA

Standby Power: 0.1W

Warranty: Five year warranty

Detection range: 32ft Max

Mounting height: 23ft Max


IP rate: IP20

Op. temperature: -30F~131F (-30°C~55°C)





Fixture Die Cut: 20.8x64.8mm

DIMENSIONS


LBL1



LBL1 Coverage Side View

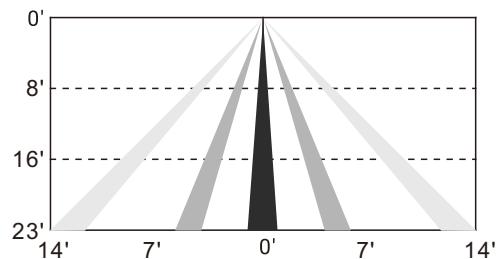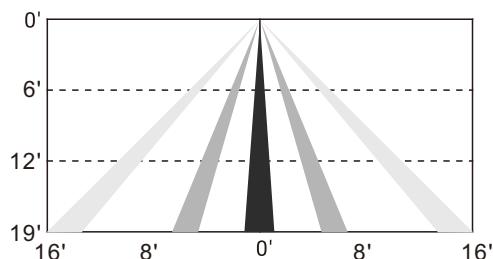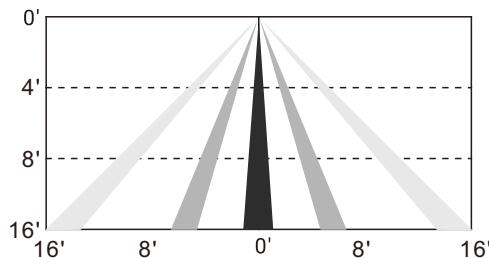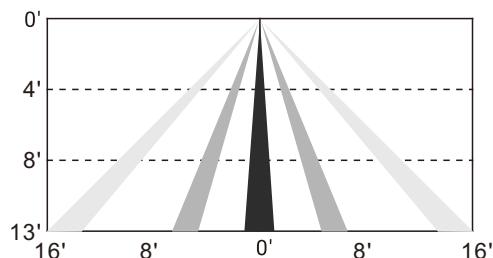

LBL1 Coverage Top View

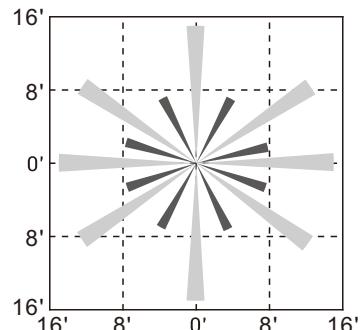


Height 19'

DIMMING CURVE

Dimming Curve																				
0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10
0.001	0.5	1.01	1.51	2.01	2.51	3.02	3.52	4.03	4.53	5.04	5.54	6.05	6.54	7.05	7.55	8.06	8.55	9.07	9.56	9.97

Voltage

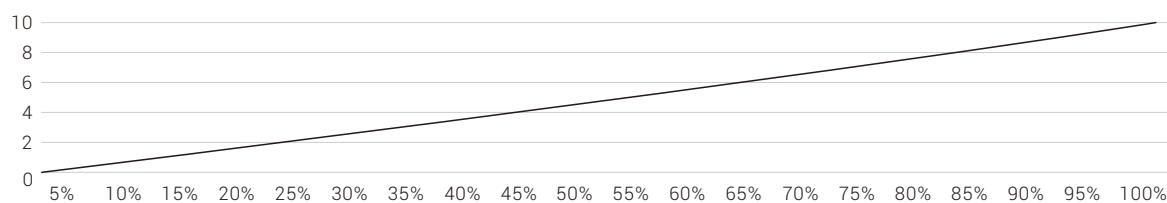

REMOTE INSTRUCTION

Memory Mode (Commissioning) To begin commissioning, follow the steps below:

1. Select either A, B, C, D.
2. Indicator lights on the remote will flash to indicate the current saved settings.
3. Settings can be configured by pressing appropriate buttons in the highlighted gray area of the remote. (TRIM-LEVEL, SENSITIVITY, HOLD TIME, STANDBY DIM, STANDBY TIME, and PHOTOCELL). Review selected settings and make changes as necessary.
4. Point IR remote to desired luminaire for configuration and press "SEND".
5. If configuration is successful, luminaire will flash two times suggesting settings are saved. Any parameter change to the current saved settings on A to F will override previous settings and will be automatically saved on the remote. If configuring multiple luminaires, select the configured memory mode A to E then follow steps 4 and 5.

*** **E Mode** allows visual adjustment to choose the desired dimming Level.

Continuous Adjustment Mode or Daylight Harvesting (F Mode)

Enables dimmability in response to daylight availability.

1. Point IR remote to desired luminaire
2. Press "ON" then press DIM+ or DIM- to adjust dimming level.
3. Press "F", indicator lights on the remote will indicate current saved settings. Note: only TRIM-LEVEL, SENSITIVITY, and HOLD TIME can be selected for Daylight Harvesting settings.
4. Review selected settings and make changes as necessary. Press "SEND".
5. If configuration is successful, luminaire will flash twice to confirm setting saved.

If configuring multiple luminaires, select the configured DAYLIGHT HARVESTING settings then follow steps 4 and 5.

ON	Turns On Luminaires
OFF	Turns OFF Luminaires
TEST	Test mode will last 5 mins then return to previous setting Test mode will hold time 2 seconds SDL 50% and standby time 2 seconds
RESET	See below for factory settings highlighted in yellow
DIM+/-	Remote will manually dim luminaire up or down by increments of 0.5volts. Must be smooth dimming if holding dimming button.
TRIM-LEVEL	Set Maximum threshold value 50/75/100%(Default = 100%)
SENSITIVITY	OFF(PIR OFF Enter PC ON/OFF function)/LOW(50%)/HIGH (100%) (Default=HIGH)
HOLD TIME	(time of no occupancy after which fixture goes to stand by) 30s / 5min / 15min / 30min (Default= 5min)
F MODE DAYLIGHT HARVESTING	(Enable/Disable) Measure and set feature to allow the fixture to maintain a light level. If turned ON. (Default = Disabled)
STANDBY DIM	Select any standby dim level 0/10/30/50% (Default=50%)
STANDBY TIME	Stand by time - 10s / 5min / 15min / 30min / 1h / ∞. "∞" means the stand-by time is infinite and the fixture is effectively controlled by the daylight sensor) (Default=30min)
PHOTOCELL	LOW (1fc) MED (20fc) and HIGH (50fc) settings (Default = Disabled) CAL Collecting The current Lux Level
MODE	Set settings to a Program profile A to D
SEND	Send settings to sensor

