



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Compact Linear High Bay Series



Enhance your commercial and industrial lighting with WareLight's Oslo Compact Linear High Bay Fixture. This versatile lighting solution combines power with efficiency. Perfect for warehouses, factories, retail spaces, and gyms, the Oslo High Bay fixture is designed for maximum durability and performance.

## Specifications

CRI	<80	Ratings and Certifications	cUL UL DLC Premium
Light Source	LED	Dimmable	0-10V (0%-100%)
Voltage	120-277V & 277-480V	Beam Angle	90°
Color Temperature	4000K/5000K Select	Mounting Options	Suspended, Pendant, Surface
Wattage	Selectable (70-300W)	Operating Temperature	-40°F to 122°F
LPW	140-150LPW	Lumens	9,800-42,000Lm
Housing	Steel (110W/165W) Aluminum (300W)	Finish	White
Lifespan	50,000	Warranty	5 Year





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

Oslo Series				Example: WL-CLHB-110W-2CTS-WH-G2			
Series	Wattage	Color Temperature	Finish	Voltage	Mounting	Accessories	
<b>WL-CLHB</b>	<b>110W</b> 70/90/110W	<b>2CTS</b> Selectable 4000K/5000K	<b>WH</b> White	<b>blank</b> 120-277V	<b>blank</b> Vclips	<b>blank</b> No Sensor	
					<b>ACCK5LP</b> 5' Aircraft Cable Kit	<b>PIR</b> PIR Sensor	
	<b>165W</b> 130/150/165W				<b>ACCK10LP</b> 10' Aircraft Cable Kit	<b>MWS</b> Microwave Sensor *Remote Required	
					<b>300W</b> 220/275/300W	<b>PMK</b> Pendant Mount Kit	<b>BMS</b> Bluetooth Sensor - WareSense Blue
						<b>SMK</b> Surface Mount Kit	

## Accessories

### PIR Sensor

ANT-6-4T



### Microwave Sensor

ANT-5-4T



### Remote

RC-100



## Performance Chart

Item	Wattage	Lumens	Efficacy	CRI
WL-CLHB-110W-2CTS-WH-G2	70/90/110W	9,800/12,600/15,400lm	140 LM/W	>80
WL-CLHB-165W-2CTS-WH-G2	130/150/165W	18,200/21,000/23,100lm	140 LM/W	>80
WL-CLHB-300W-2CTS-WH-G2	220/275/300W	30,800/38,500/42,000lm	140 LM/W	>80
WL-CLHB-165W-2CTS-WH-HV-G2	130/150/165W	18,200/21,000/23,100lm	140 LM/W	>80
WL-CLHB-300W-2CTS-WH-HV-G2	220/275/300W	30,800/38,500/42,000lm	140 LM/W	>80




INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_


## Dimensions

Item	Length	Width	Height	Weight
WL-CLHB-110W-2CTS-WH-G2	24"	11.8"	1.6"	
WL-CLHB-165W-2CTS-WH-G2	24"	11.8"	1.6"	
WL-CLHB-300W-2CTS-WH-G2	24"	14.2"	1.6"	

### 110W & 165W

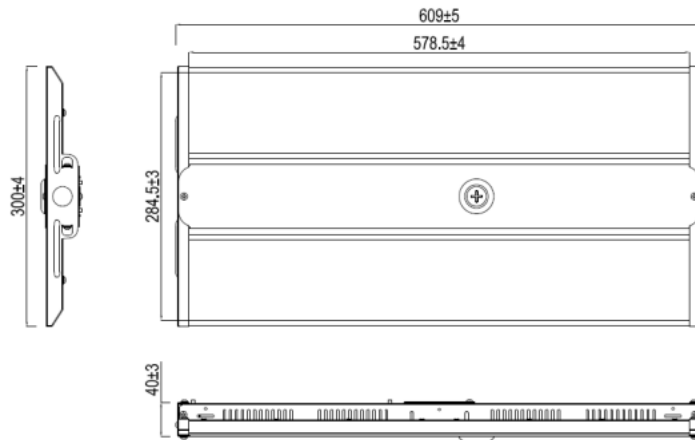

### 300W

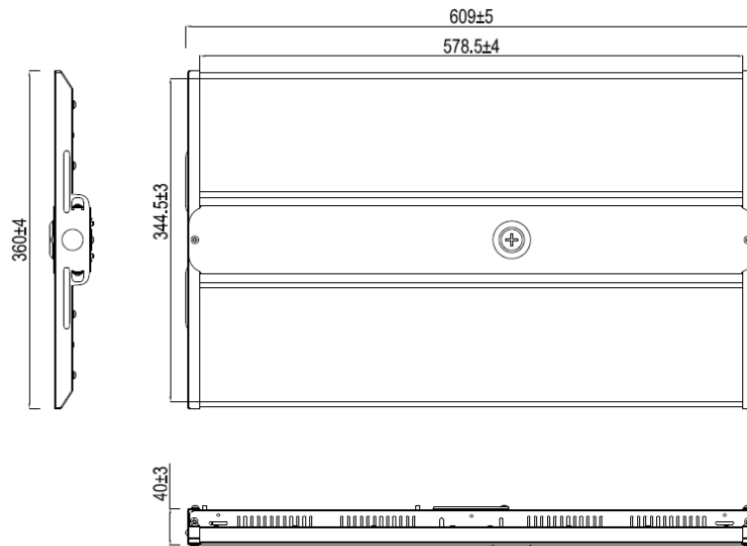




INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME  
ITEM #  
FIXTURE SCHEDULE  
NOTES

## WareSense Blue: Your All-In-One Lighting Solution

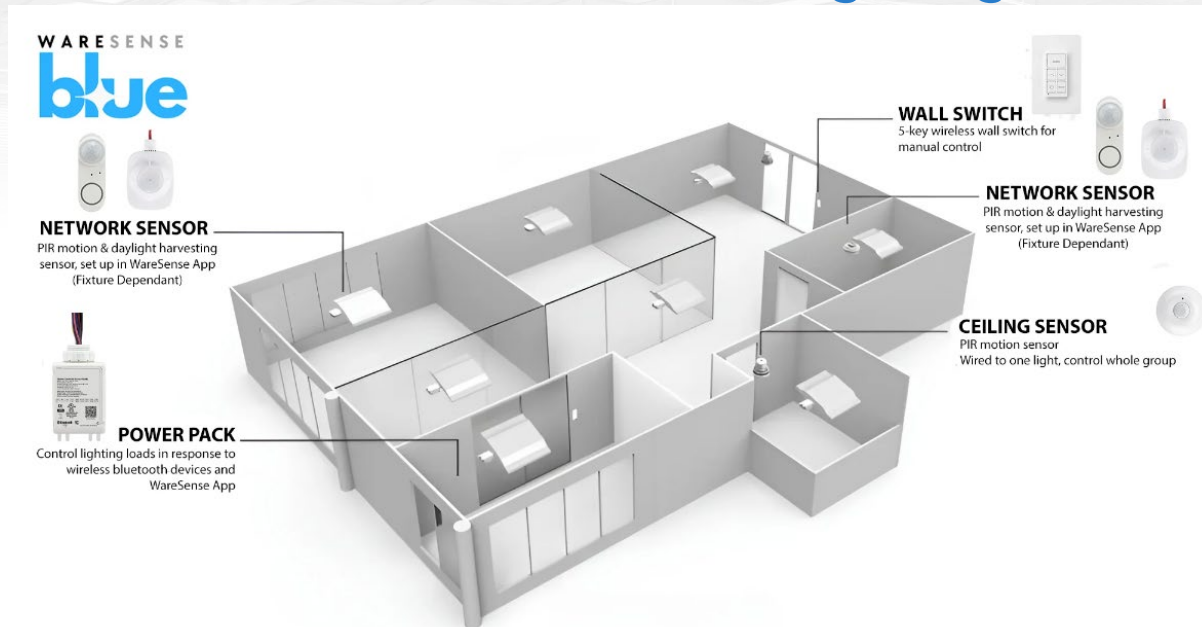

A simple and cost effective localized networked lighting control system using bluetooth mesh.

WareSense Blue delivers a comprehensive, gateway-free wireless solution for managing lighting across diverse settings. This innovative system features wireless controllers for fixtures, switches, and sensors for occupancy and daylight harvesting, all leveraging Bluetooth® technology. Additionally, the system includes a fixture-mounted controller and sensor that combine wireless communication and occupancy/daylight harvesting control into a single unit. Each component is uniquely addressed to send, receive, and share control commands wirelessly. Scalability is straightforward, as each device relays information to the next, extending the network's range and control capabilities.

## App Download

