



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Area Light Series



Optimize your outdoor lighting with WareLight's high-efficiency LED Area Lights, designed to provide top-tier performance and versatility. Available with optional photocell control and motion sensors, these lights can adapt to environmental changes and human presence, further enhancing energy savings and convenience. Whether lighting up a large parking area or enhancing security in commercial spaces, our LED Area Lights offer the flexibility and performance to meet diverse lighting needs.

Specifications

CRI	>70	Beam Angle	Type II, III, IV and V
Light Source	LED	Mounting	Universal, Slip Fitter, Pole and Yoke
Dimmable	0-10V	Operating Temperature	-40°C TO 45°C (-40°F TO 113°F)
CCT	Selectable 3000K/4000K/5000K	Housing	Cast Aluminum
Wattage	Selectable 70W-300W	Voltage	120-277v
LPW	130 LPW	Finish	Bronze
Lumens	22,007-43,360	Warranty	5 Years
Ratings and Certifications	UL, cUL, DLC Premium, IP65		

**Data is considered to be representative of the series. Actual production may vary between up to $\pm 10\%$ of initial delivered lumens.*





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information

Area Light Series			Example: WL-AL-150W-CWS-T3-AUM-DM010-BZ				
Series	Wattage	CCT	Optic	Mounting	Dimmable	Color	Accessories
WL-AL	150W 70W/100W/150W	CWS 3000K/4000K/5000K	T2 Type II	AUM Adj. Universal Mount	DM010 0-10V Dimmable	BZ Bronze Housing	PC Photocell
			T3 Type III (standard)	ASF Adj. Slip Fitter			MS Motion Sensor
	300W 200W/240W/300W		T4 Type IV	FPM Fixed Pole Mount			BMS Bluetooth Motion Sensor
			T5 Type V	AYK Adj. Yoke Mount			PC-MS Photocell and Motion Sensor

*Accessories Sold Separately

Photocell (PC)



Motion Sensor (MS)



Bluetooth Motion Sensor (BMS)



Shield Reflector (WL-AL-SR)



Mounting Options



Slip Fitter Mount



Pole Mount



Universal Mount
(Included)



Adjustable Yoke Mount



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____


Performance Chart

Model Number	Wattage	Lumens	Efficacy	CRI
WL-AL-150W-CWS-T3-AUM-DM010-BZ	70W/100W/150W	22,007 Lumen Max	130 LM/W	>70
WL-AL-300W-CWS-T3-AUM-DM010-BZ	200W/240W/300W	43,360 Lumen Max	130 LM/W	>70


Dimensions

Item	Length	Width	Height	Weight
WL-AL-150W-CWS-T3-AUM-DM010-BZ	23.7"	9.8"	6.4"	10 lbs.
WL-AL-300W-CWS-T3-AUM-DM010-BZ	30.5"	13.3"	6.4"	14.55 lbs.

WL-AL-150W

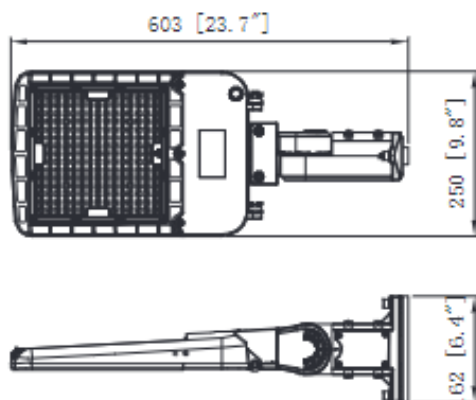

WL-AL-300W

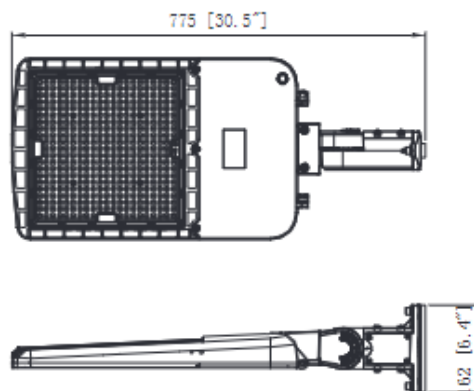




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

WareSense Blue: Your All-In-One Lighting Solution

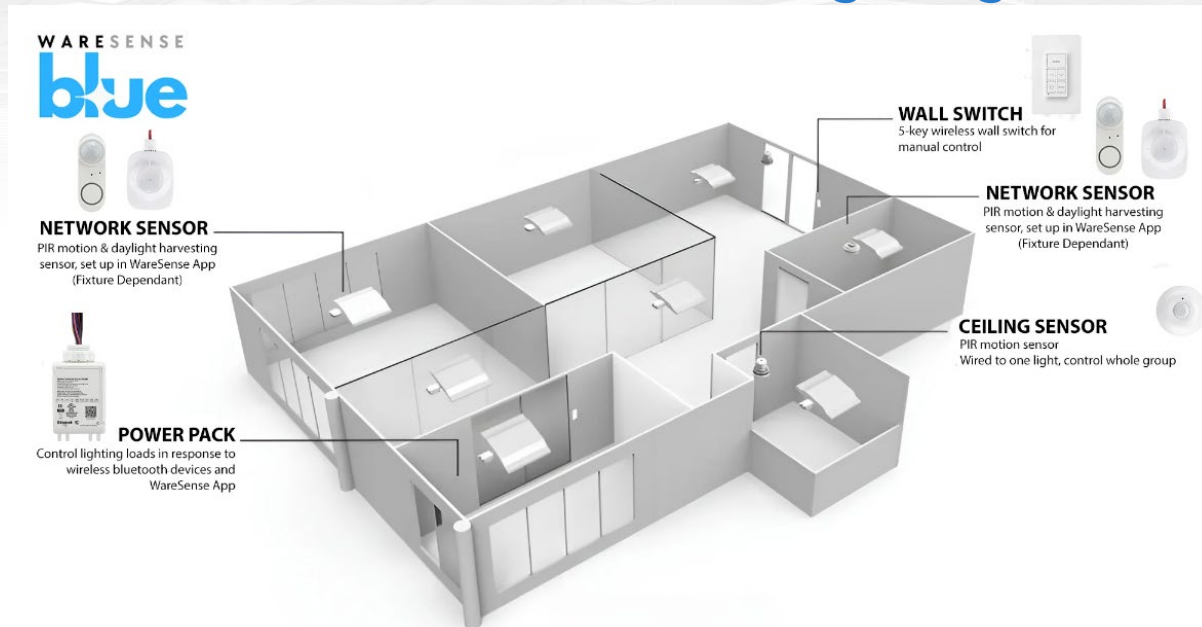

A simple and cost effective localized networked lighting control system using bluetooth mesh.

WareSense Blue delivers a comprehensive, gateway-free wireless solution for managing lighting across diverse settings. This innovative system features wireless controllers for fixtures, switches, and sensors for occupancy and daylight harvesting, all leveraging Bluetooth® technology. Additionally, the system includes a fixture-mounted controller and sensor that combine wireless communication and occupancy/daylight harvesting control into a single unit. Each component is uniquely addressed to send, receive, and share control commands wirelessly. Scalability is straightforward, as each device relays information to the next, extending the network's range and control capabilities.

App Download

