




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

LED RGB+W Beam Direct Series

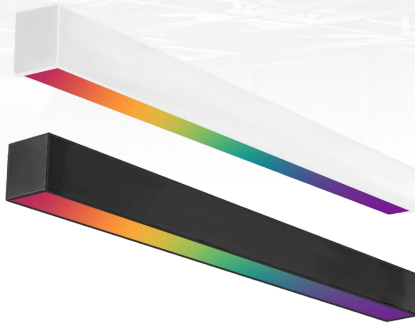

WareLight's RGB+W linear architectural down light fixture can fulfill a number of lighting needs. It offers a sophisticated, on-trend look, energy efficiency, easy installation, and delivers years of reliable, maintenance-free operation. It is available in 4-foot and 8-foot lengths and black or white finishes. It can be surface, wall*, recessed*, and pendant mounted.

Specifications

CRI	>80	Ratings & Certifications	UL, cUL Listed for Damp Locations
Light Source	Integrated LED	Beam Angle	Wide
Dimmable	0-10v	Linkable	*600 watt maximum
Color Temperature	Tunable 3000-5000K	Mounting Options	Surface, Suspended, Wall*, Recess*
Wattage	White 40W-80W+RGBW	Operating Temperature	-20° C to 40° C (-4° F to 104° F)
LPW	110-120lm/w	Lumens	4400-9600lm
Voltage	120-277v	Lens	Polycarbonate Frosted
Finish	Black, White, Acoustic or Wood	Warranty	5 Years

*Acoustic and wood finishes are not linkable.





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME
ITEM #
FIXTURE SCHEDULE
NOTES

Order Information

RGBW Beam Direct Series				Example: BEAMLED8-80W-RGBW-DMV-BK	
Series	Length	Wattage	CCT	Voltage	Finish
BEAMLED	4 4 Foot	40W 40 Watt	RGBW Tunable 3000-5000K	DMV Universal Voltage (120-277)	BK Black
	8 8 Foot	80W 80 Watt			WH White

App Control

*Controlled via Bluetooth, using App controls or Bluetooth switch (Sold Separately).



Performance Chart

Model Number	Size	Wattage	Lumens	Efficacy	CRI
beamled4-40w-rgbw-dmv-bk	4 FT	White 40W+RGB5W	4,400-4,800	110-120 LM/W	>80
beamled4-40w-rgbw-dmv-wh	4 FT	White 40W+RGB5W	4,400-4,800	110-120 LM/W	>80
beamled8-80w-rgbw-dmv-bk	8 FT	White 80W+RGB15W	8,800-9,600	110-120 LM/W	>80
beamled8-80w-rgbw-dmv-wh	8 FT	White 80W+RGB15W	8,800-9,600	110-120 LM/W	>80




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____


Dimensions

Item	Length	Width	Height	Weight
beamled4-40w-rgbw-dmv-bk	47.32"	2.76"	3.35"	6.61 lbs.
beamled4-40w-rgbw-dmv-wh	47.32"	2.76"	3.35"	6.61 lbs.
beamled8-80w-rgbw-dmv-bk	94.17"	2.76"	3.35"	12.13 lbs.
beamled8-80w-rgbw-dmv-wh	94.17"	2.76"	3.35"	12.13 lbs.

BEAMLED4



BEAMLED8



Mount Options

Name	Part #	Description
Suspended (Included)	(blank)	10' aircraft cable kit, with color match canopy covers for drop ceiling or open ceiling applications.
Wall Mount Kit	WMK	Designed for secure horizontal mounting to vertical surfaces.
T-Bar Mount Kit	TBSMK	Easily recess linear fixtures into standard T-bar ceiling grids
Mud Flange Kit	MFK	Allows recessed installation with a clean, flangeless appearance in drywall ceilings.
Recessed Flange Kit	RFK	Provides a recessed mounting with a visible trim flange


*Acoustic & wood available with suspension mounting only.





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

RGBW Beam L Connectors

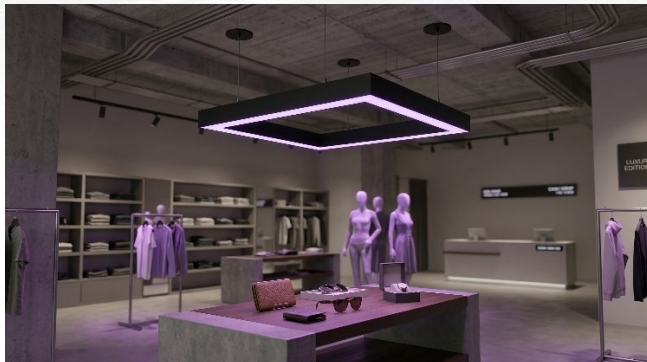

Create dynamic lighting patterns with our L Shape Linear Architectural RGBW Beam Connector, the essential piece for building custom configurations. This connector seamlessly joins our 4' and 8' RGBW beams at 90-degree angles, allowing you to design corner installations, geometric layouts, and architectural accents tailored to your space.




Item	Joint Type	Dimensions
BEAMLED-RGBW-L-CNTR-BK	L	5.79" L x 5.79" W x 3.35" H
BEAMLED-RGBW-L-CNTR-WH	L	5.79" L x 5.79" W x 3.35" H





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003


PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Finish Options

Finish	Description	
Black	Tailor your fixture's appearance with our three distinct color options; Black or White. Designed to complement a variety of aesthetics – whether you're aiming for a sleek industrial look, a clean neutral appearance or a contemporary feel.	
White		

Acoustic Finish	Description	
[4',8'] BEAMLED-ACOUSTIC-KIT-Dark Gray	Reduce noise and enhance visual comfort with our Acoustic Panels, designed specifically for LED suspended linear fixtures. Crafted from high-density PET fiber material, these panels effectively absorb sound while adding a sleek, modern touch to your space. Available in dark gray, gray, or royal blue finishes, they integrate seamlessly with your fixture for a polished look.	
[4',8'] BEAMLED-ACOUSTIC-KIT-Gray		
[4',8'] BEAMLED-ACOUSTIC-KIT-Blue		

Wood Finish	Description	
4' BEAMLED-CLOSED-WOOD-KIT-NATURAL	Add warmth and natural elegance to your lighting design with our premium wood finish options, available in Natural (Light) and Teak (Dark). These high-quality finishes bring a sophisticated, organic aesthetic to our suspended linear fixtures, making them ideal for modern offices, retail spaces, or hospitality environments seeking a refined architectural touch.	
4' BEAMLED-CLOSED-WOOD-KIT-TEAK		

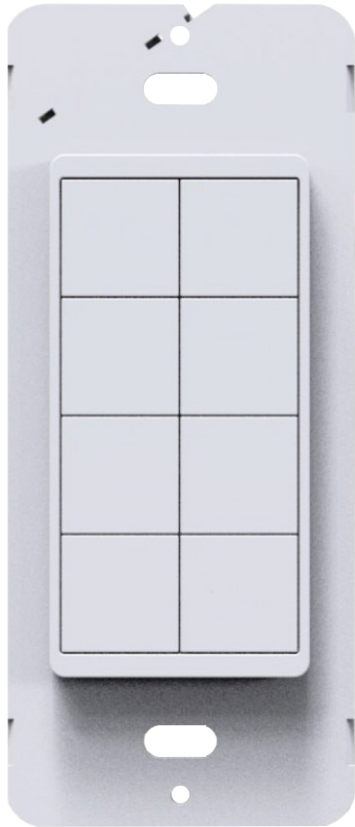

WS-NA0-02-08W

Bluetooth Smart 8 Button Panel



Product Overview

WS-NA0-02-08W is an AC powered BLE enabled wireless 8 button switch. Each button in this switch can be custom configured to control favorite luminaire, all luminaries, group, scene, scene animation from Lumos Controls mobile application. Considering the flexibility offered with multiple controls, WS-NA0-02-08W is a must have component to excel user experiences in the wireless environment.

It is a part of the Lumos Controls ecosystem, comprising controllers, sensors, switches, modules, drivers, gateways, and analytical dashboards.

The Lumos Controls ecosystem is listed by the Design Lights Consortium (DLC), qualifying it for energy conservation incentive programs and rebates by utility companies.

Features

- Universal AC powered switch
- Custom configuration of buttons from Lumos Controls mobile application
- 8 buttons for multiple functions
- BLE based wireless communication
- Over-the-Air firmware updates
- LED indications for commissioning and button press
- Compatible to designer style or standard off-the-shelf wall plates

Specifications

Electrical

Specifications	Value
Input voltage	110-277VAC
Frequency	47-63Hz

Environmental

Specifications	Value
Operating temperature	0 to 50°C (30 to 122°F)


Bluetooth

Specifications	Value
Frequency range	2402-2480MHz
Transmit power	8dBm
Receive sensitivity	-95dBm


Mechanical

Specifications	Value	Remarks
Size	44.4 x 33.2 x 105mm (1.75 x 1.31 x 4.13in)	L x W x H
Available color	White	

Product Dimensions

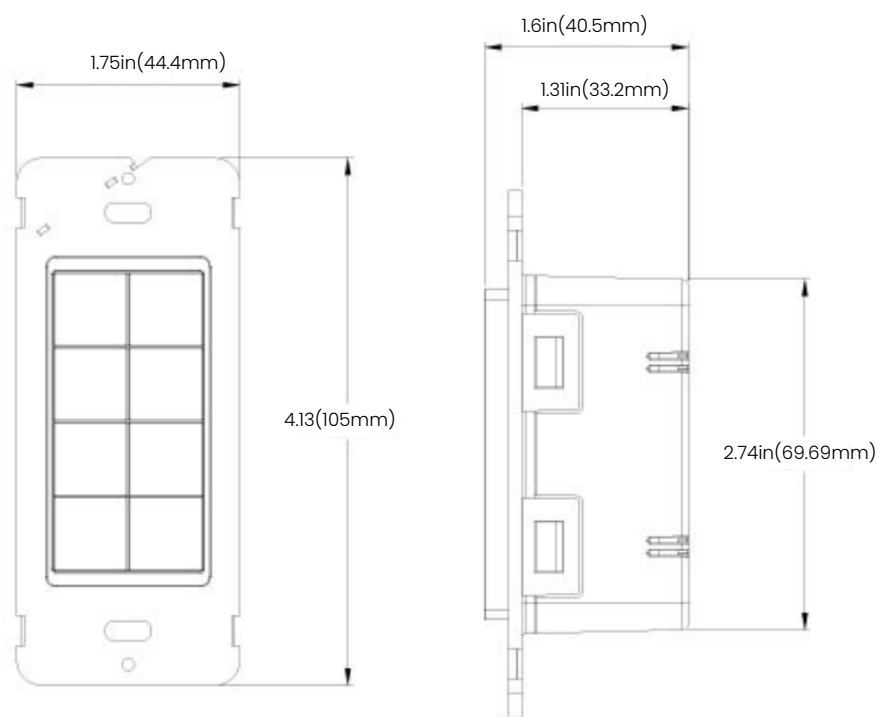

Wiring

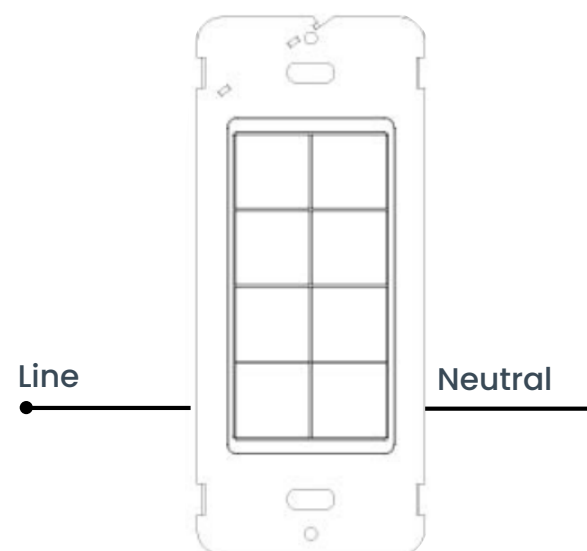


Switch Configurations


Each button of WS-NA0-02-08W can be custom configured by choosing a target and an action to control the selected target from Lumos Controls mobile application

Target	Actions
Favorite luminaire	ON, OFF, Intensity (up & down), CCT (up & down)
Group	ON, OFF, Intensity (up & down), CCT (up & down)
Scene	ON
Scene animation	Play, Stop, Pause, Next, Previous
No action	

Smart Ecosystem

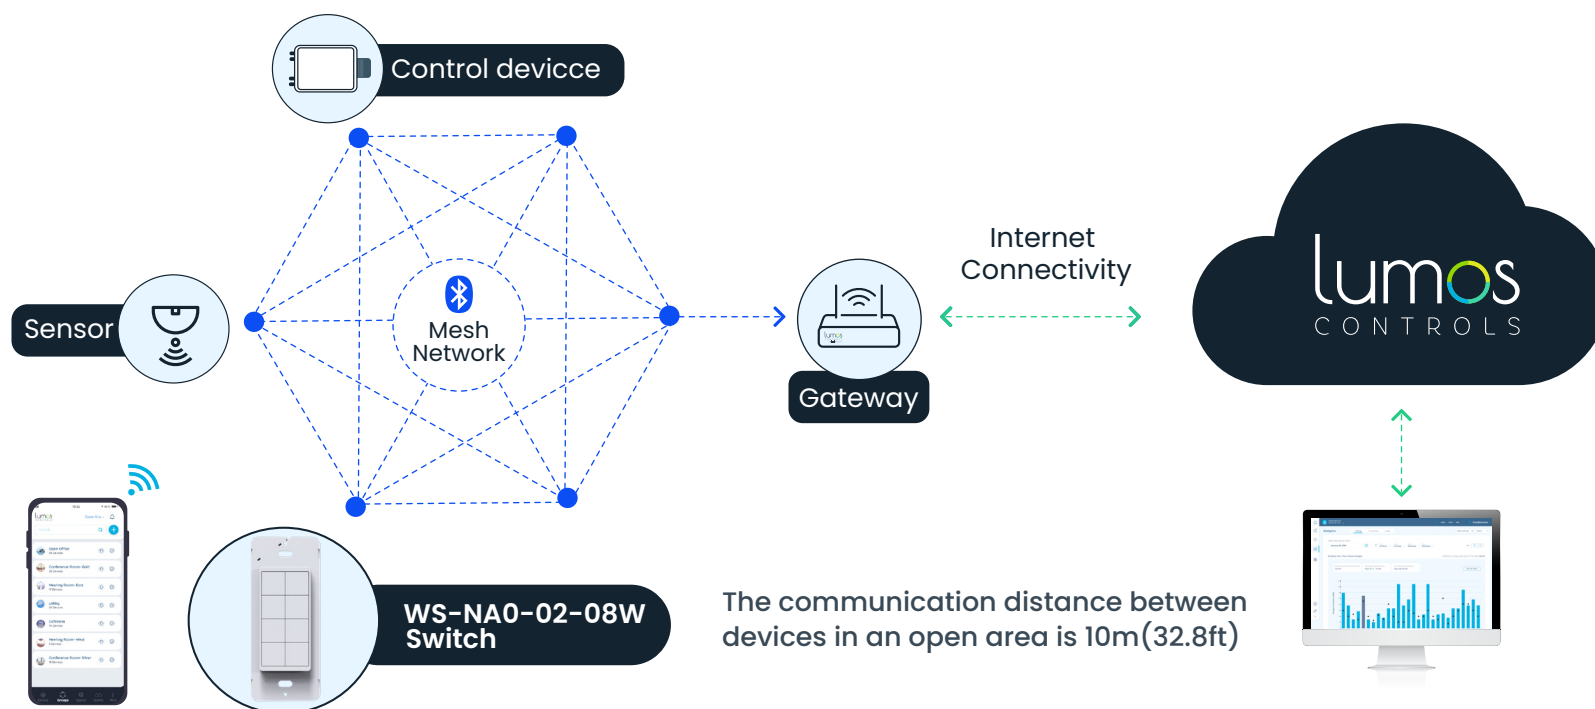


Application

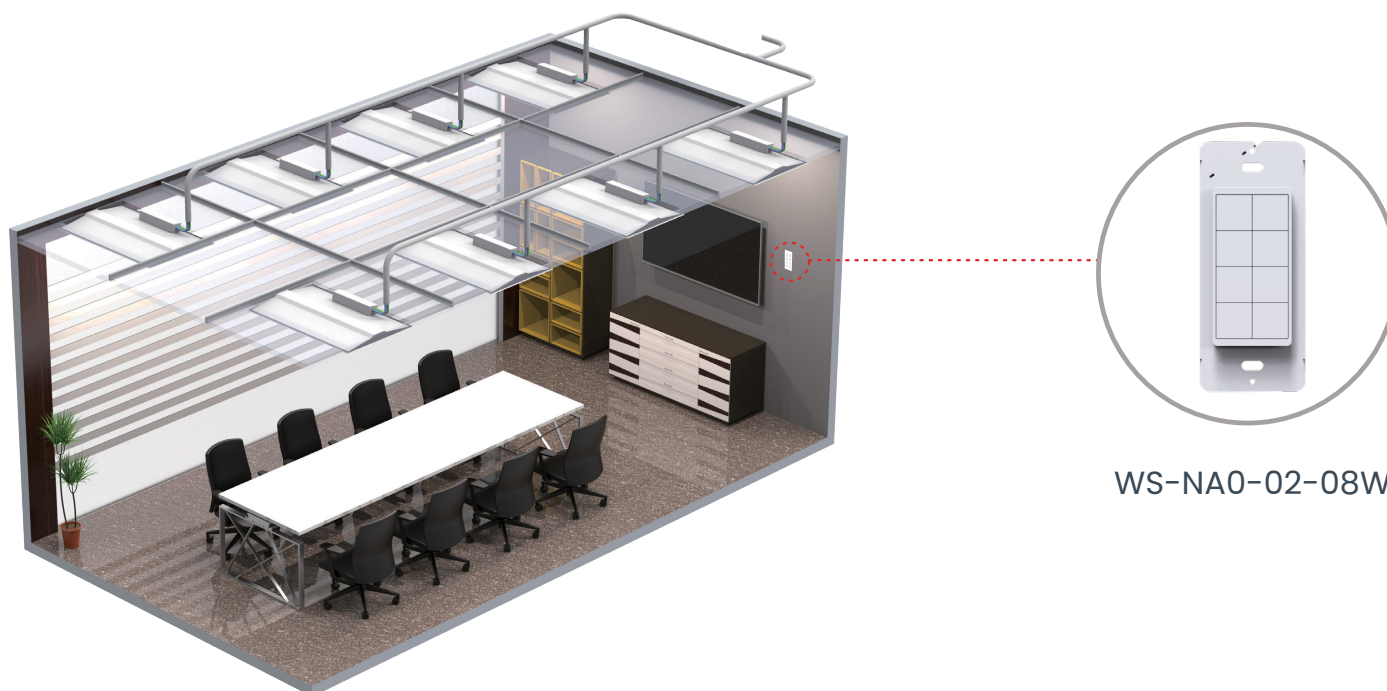

Available Plate Color

- A1 Dark Chocolate
- A2 Warm Caramel
- A3 Moon Rock
- A4 Silver Gray
- A5 Pebble Gray

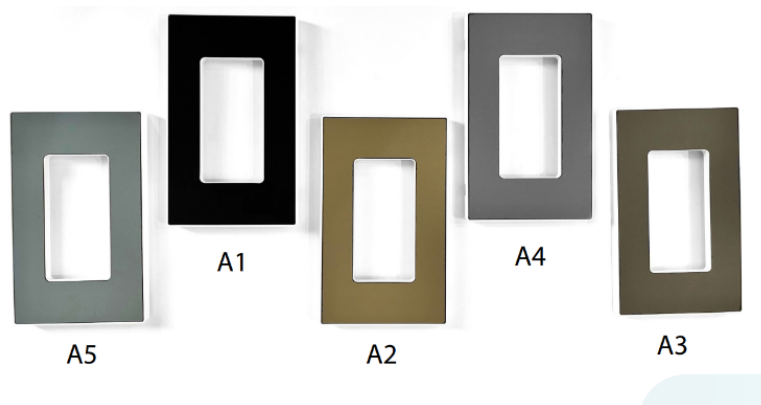

Ordering Information

Product Code	Product Description	Communication
WS-NA0-02-08	Wireless AC-Powered 8 Button Switch	BLE5.0

Custom printing available

Contact sales for more information

sales@lumoscontrols.com



Printed device samples

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by WiSilica Inc. is under license. Other trademarks and trade names are those of their respective owners.



20321 Lake Forest Dr D6,
Lake Forest, CA 92630

www.lumoscontrols.com

+1 949-397-9330