




INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# TAA Back-Lit Flat Panel Series

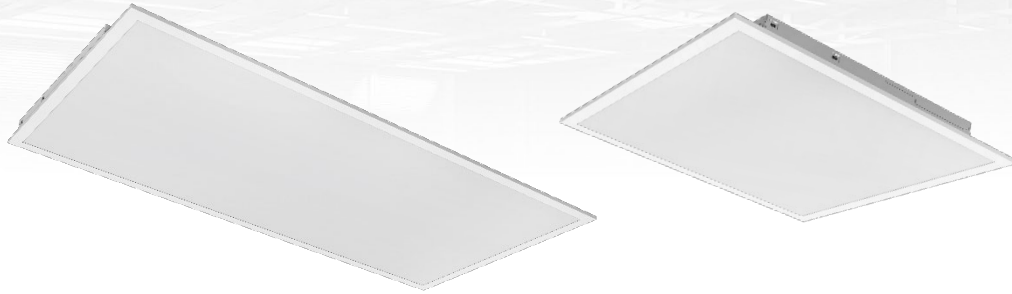

WareLight's TAA-Compliant Back-Lit LED Flat Panel delivers superior lighting performance with consistent, flicker-free illumination, ideal for commercial and industrial applications. Constructed with a slim, durable frame and advanced back-lit LED technology, this fixture ensures uniform brightness while reducing glare and minimizing shadows. Featuring selectable wattage and color temperature settings, it provides versatile lighting customization for offices, educational institutions, retail environments, and healthcare facilities—all while meeting Trade Agreements Act (TAA) compliance standards.

## Specifications

CRI	>80	Ratings and Certifications	ETL and DLC Premium
Light Source	LED	Dimmable	0-10V
Voltage	120-277	Beam Angle	120°
Color Temperature	35/40/50K Selectable	Mounting Options	Drop Ceiling, Surface Mounted
Wattage	20-50W Selectable	Operating Temperature	-20° C to 50° C (-4° F to 122° F)
LPW	125Lm/W	Lumens	2,500-6,250 Lm
Housing	Aluminum Exterior	Finish	White
Lifespan	50,000	Warranty	5 Year





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

WL-BLPLED TAA Series			Example: WL-BLPLED-2x2-40W-3WS-3CCT-DM010-TAA		
Series	Length	Wattage	Color Temperature	Dimming	Compliance
<b>WL-BLPLED</b>	<b>2x2</b> 2X2 Available in 40W	<b>40W-3WS</b> 20/30/40W Selectable	<b>3CCT</b> 35/40/50K Selectable	<b>DM010</b> 0-10V Dimmable	<b>TAA</b> Trade Agreements Act
	<b>2x4</b> 2x4 Available in 50W	<b>50W-3WS</b> 30/40/50W Selectable			

## Performance Chart

Item	Wattage	Lumens	Efficacy	CRI
WL-BLPLED-2x2-40W-3WS-3CCT-DM010-TAA	20/30/40W	2500/3750/5000	125 LM/W	>80
WL-BLPLED-2x4-50W-3WS-3CCT-DM010-TAA	30/40/50W	3750/5000/6250	125 LM/W	>80

## Dimensions



Item	Length	Width	Height	Weight
WL-BLPLED-2x2-40W-3WS-3CCT-DM010-TAA	23.8"	23.8"	1.3"	
WL-BLPLED-2x4-50W-3WS-3CCT-DM010-TAA	47.8"	23.8"	1.37"	



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

### WL-BLPLED-2x2

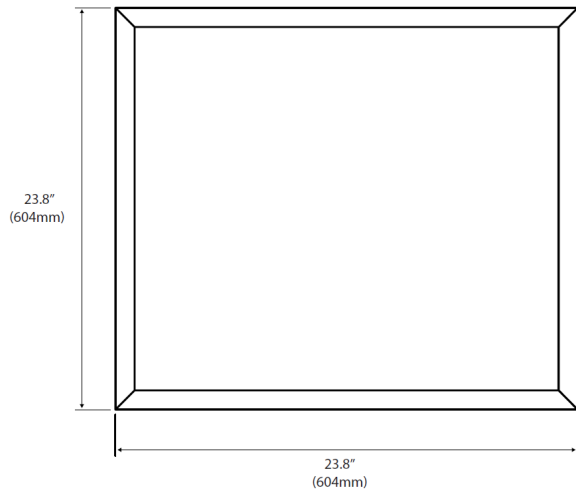

### WL-BLPLED-2x4

