



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Temporary LED Stringer Lights



Light your job site with dependable, high-output performance using WareLight's 50FT or 100FT Temporary LED Stringer Lights. Designed for construction sites, renovation projects, and industrial applications, these temporary lights evenly distribute light to keep crews productive and safe. Built with durable PC housing, this temporary lighting solution withstands tough jobsite conditions. The IP65 rating ensures reliable operation in dusty and damp environments, making it ideal for both indoor and outdoor use. These stringers are linkable, allowing you to scale lighting across larger areas without complicated wiring.

## Specifications

CRI	>80	Beam Angle	110°
Light Source	LED; Philips 2835	Mounting	Suspended
Dimmable	No	Operating Temperature	-40°C TO 50°C
CCT	5000K	Housing	Anti-Impact PC
Wattage	80W or 160W	Voltage	120V
LPW	125 Lm/W	Finish	Yellow/Black
Lumens	10,000-20,000Lm	Warranty	5 Years
Ratings and Certifications	ETL, FC, IP65		





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

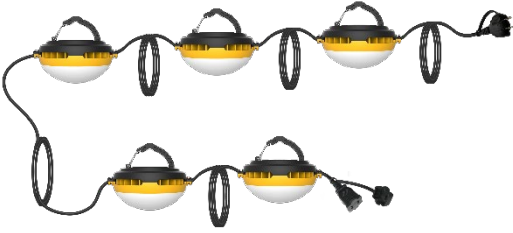
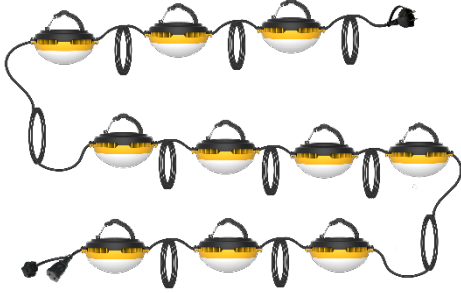
## Order Information

Temporary LED Stringer		Example: WL-TMPLED-80W-50K-120V	
Series	Wattage	Color Temperature	Voltage
<b>WL-TMPLED</b> Temporary LED	<b>80W</b> Set of 5	<b>50K</b> 5000K	<b>120V</b> 120 VAC - 12
	<b>160W</b> Set of 10		

## Performance Chart

Model Number	Wattage	Lumens	Efficacy	CRI
WL-TMPLED-80W-50K-120V	80W	10,000	125 LM/W	>80
WL-TMPLED-160W-50K-120V	160W	20,000	125LM/W	>80

## Linkable

5 Lamps One Set	10 Lamps One Set
	
80W Maximum Link 5 Sets (18 AWG), 8 Sets (16 AWG)	160W Maximum Link 3 Sets (18 AWG), 4 Sets (16 AWG)
5 lamps one set (Standard) / L = 50ft (15m)	10 lamps one set (Standard) / L = 100ft (30m)



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Dimensions

Item	Length	Width	Height	Weight
WL-TMPLED-80W-50K-120V	600"	4.33"	3.58"	4.8 lbs.
WL-TMPLED-160W-50K-120V	1200"	4.33"	3.58"	9.57 lbs.

