



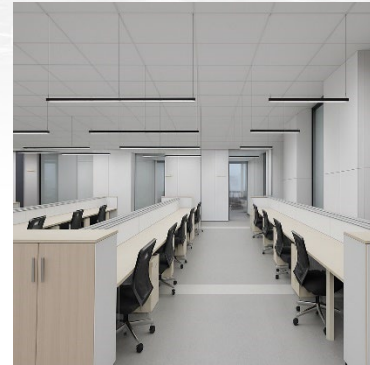

INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# WL-TRACE Series

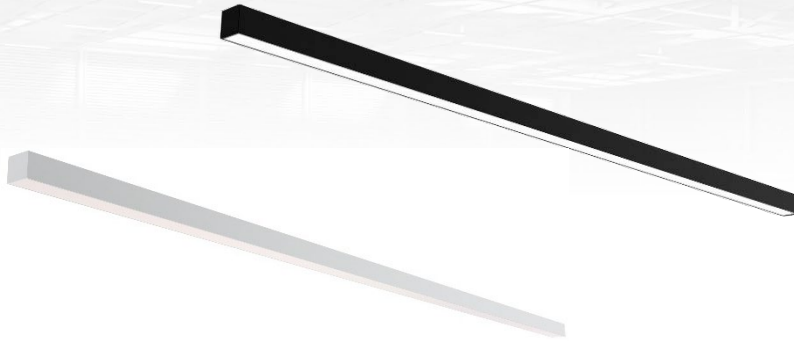

Elevate your lighting design with the TRACE Series Slim Linear Fixture — engineered for versatility and architectural elegance. With a slender 1" wide profile and a modern suspended or grid mount option, this fixture blends seamlessly into any commercial or design-forward space. This high-performance luminaire features selectable CCT and wattages, allowing for on-site customization to suit various environments and preferences. Designed with an opal lens for soft, uniform light diffusion and a sleek sandy white or black housing, the TRACE Series delivers both form and function.

## Specifications

CRI	>82	Ratings & Certifications	UL/cULus Listed, Damp Location
Dimmable	0-10v	Beam Angle	95°
Color Temperature	Selectable 3500K/4000K/5000K	Mounting Options	T-Grid, Surface, Suspended
Wattage	Selectable 5W-20W	Operating Temperature	-30 ~ 40 °C (-22°F to +104°F)
LPW	115/w	Lumens	575-2,300
Voltage	120-277v	Lens	Opal
Finish	White or Black	Warranty	5 Years





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

TRACE Series			Example: WL-TRACE4-20W-3WS-3CCT-DM010-WH				
Series	Size	Wattage	Color Temperature	Dimming	Finish	Mounting	Driver
<b>WL-TRACE</b> 1" Wide Linear Series	<b>2</b> 2 Foot	<b>10W-3WS</b> 5/7.5/10W Selectable	<b>3CCT</b> 35/40/50K Selectable	<b>DM010</b> 0-10V Dimmable	<b>WH</b> White Housing	<b>(blank)</b> T-Bar Mount (Included)	<b>40WDRI</b> 40W Remote Driver (Up to 40W – 4 Slots)
	<b>4</b> 4 Foot	<b>20W-3WS</b> 10/15/20W Selectable				<b>SUSP</b> Suspension Canopy Kit	
					<b>BK</b> Black Housing	<b>SUSP+COVER</b> Suspension Canopy Kit + Decorative Driver Cover	<b>80WDRI</b> 80W Remote Driver (Up to 80W – 4 Slots)

10FT Aircraft Cable (SUSP)

Junction Box & Driver Cover (SUSP+COVER)

\*40W and 80W Driver



\*This fixture requires an external driver, do not exceed the driver's maximum capacity. Calculate the total wattage and pick adequate driver(s) as power supply. The fixture includes a grid mount and supports up to four connections.

\*Cables for light engine are E/M & Plenum, Temp Rating 105°C, 4-Conductor, PVC

## Performance Chart

Item	Size	Wattage	Lumens	Efficacy	CRI
WL-TRACE4-20W-3WS-3CCT-DM010-[WH,BK]	4 FT	10W/15W/20W	1150/1725/2300	115 LM/W	>82
WL-TRACE2-10W-3WS-3CCT-DM010-WH	2 FT	5/7.5/10W	575/862/1150Lm	115 LM/W	>82

## Dimensions

Item	Length	Width	Height	Weight
WL-TRACE4-20W-3WS-3CCT-DM010-[WH,BK]	48.0"	1.0"	1.3"	2.09 lbs.
WL-TRACE2-10W-3WS-3CCT-DM010-WH	24.0"	1.0"	1.3"	1.76 lbs.