




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

TAA Back-Lit Flat Panel Series

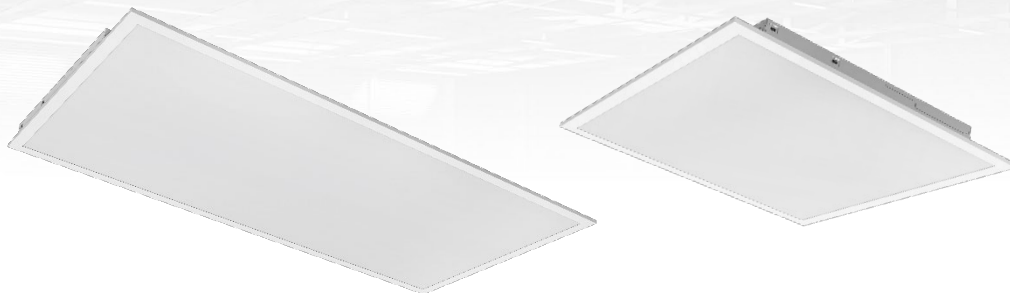

WareLight's TAA-Compliant Back-Lit LED Flat Panel delivers superior lighting performance with consistent, flicker-free illumination, ideal for commercial and industrial applications. Constructed with a slim, durable frame and advanced back-lit LED technology, this fixture ensures uniform brightness while reducing glare and minimizing shadows. Featuring selectable wattage and color temperature settings, it provides versatile lighting customization for offices, educational institutions, retail environments, and healthcare facilities—all while meeting Trade Agreements Act (TAA) compliance standards.

Specifications

CRI	>80	Ratings and Certifications	ETL Listed, DLC 6.0, TAA Compliant
Light Source	LED	Dimmable	0-10V
Voltage	120-277	Beam Angle	120°
Color Temperature	30/35/40/50/60K Selectable	Mounting Options	Grid/lay-in (standard), Surface Mount
Wattage	20-72W Selectable	Operating Temperature	-4°F to 122°F (-20°C to 50°C)
LPW	120Lm/W	Lumens	2,400-8,640 Lm
Housing	Steel frame with PET-coated chassis	Finish	White
Lifespan	50,000	Warranty	5 Year





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information

WL-BLPLED TAA Series			Example: WL-BLPLED-2x2-40W-5WS-5CCT-DM010-TAA		
Series	Length	Wattage	Color Temperature	Dimming	Compliance
WL-BLPLED	2x2	40W-5WS 20/25/30/35/40W Selectable	5CCT 30/35/40/50/60K Selectable	DM010 0-10V Dimmable	TAA Trade Agreements Act
	2x4	72W-5WS 30/40/50/60/72W Selectable			

Emergency Battery Backup

Item	Part Code	Description
BLPLED-EM-8W	EM	8W Emergency Battery Backup for WL-BLPLED Series - BLD-HM08D-YYY/5000
BLPLED-EM-DBOX	JBOX	Optional Junction Box for Mounting and Wiring EMB

Mounting

Item	Part Code	Description
Grid/Lay-In	blank	Standard Mounting Type
BLPLED-SMK-2x4	SMK	Surface Mount Kit, 2.4" Height

Performance Chart

Item	Wattage	Lumens	Efficacy	CRI
WL-BLPLED-2x2-40W-5WS-5CCT-DM010-TAA-G2	20/25/30/35/40W	2400/3000/3600/4200/4800	120	>80
WL-BLPLED-2x4-72W-5WS-5CCT-DM010-TAA-G2	30/40/50/60/72W	3600/4800/6000/7200/8640	120	>80




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Dimensions

Item	Length	Width	Height
WL-BLPLED-2x2-40W-5WS-5CCT-DM010-TAA-G2	23.74"	23.74"	1.36"
WL-BLPLED-2x4-72W-5WS-5CCT-DM010-TAA-G2	47.76"	23.74"	1.36"

WL-BLPLED-2x2

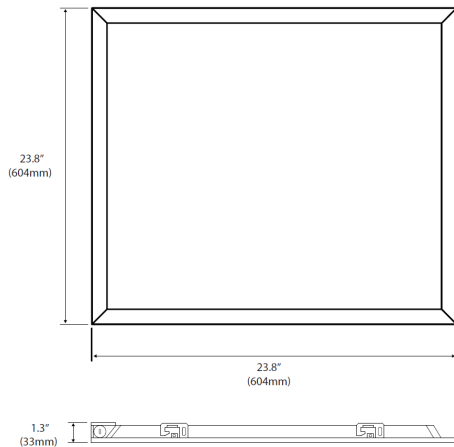

WL-BLPLED-2x4

