




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

LED Overhead Bed Light

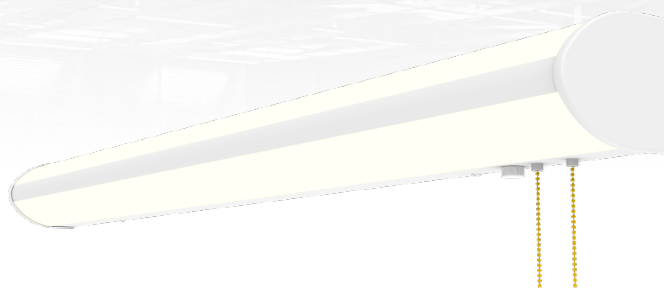

WareLight's 4' LED Overhead Bed Light pairs 40W of direct task lighting with 20W of indirect uplight, creating balanced, glare-free illumination right where it's needed over the bed. Designed for hospitality, senior living, healthcare, dormitory, and multi-family residential spaces, it offers selectable CCT to easily match the light to the room, along with 125 lm/W efficacy, universal 120-277V voltage, and 0-10V dimming for efficient, flexible performance in nearly any setting. A built-in pull chain rounds out the design, giving residents or guests simple, reliable manual control right at the bedside.

Specifications

CRI	>80	Voltage	120V-277V
Light Source	LED	Operating Temperature	-4°F to +104°F
Dimmable	0-10V	Lens	Polycarbonate milky diffuser
CCT	Selectable 27/30/35/40/50K	Mounting	Wall
Wattage	60W (20W Up/40W Down)	Finish	White
LPW	125 Lm/W	Ratings and Certifications	UL Listed, Damp Location
Lumens	7,500	Warranty	5 Years





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information

LED Overhead Bed Light		Example: WL-OBL4-DID-60W-5CCT-DM010		
Series	Size/Length	Wattage	Color Temperature	Dimming
WL-OBL Overhead Bed Light	4 4 Feet	DID-60W 60W (20W Up/40W Down)	5CCT Selectable 27/30/35/40/50K	DM010 0-10V Dimmable


Performance Chart

Model Number	Wattage	Lumens	Efficacy	CRI
WL-OBL4-DID-60W-5CCT-DM010	60W (20W Up/40W Down)	7,500	125 LM/W	>80

Dimensions

Item	Length	Width	Height
WL-OBL4-DID-60W-5CCT-DM010	48.52"	4.72"	4.63"

Photometrics

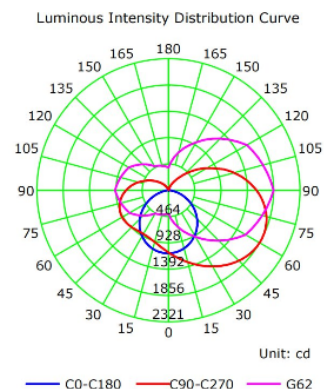

Luminaire	4000K
Input Voltage(VAC)	120-277V
Power (W)	62.6W
Delivered Lumen(Lm)	7680.8Lm
Efficacy(Lm/W)	123lm/W
Beam Angle	H108.5 V219.8
Power Factor(PF)	>90
Color Rendering Index(CRI)	>80